

- ★ FUEL DISPENSERS
- ★ ADBLUE DISPENSERS
- ★ CHARGING PILE
- ★ INDUSTRIAL PUMP
- ★ MOBILE CONTAINER FUELING STATION
- ★ ELECTRONIC PARTS
- ★ MECHANICAL PARTS
- ★ TANK GAUGING SYSTEM
- ★ FUEL MANAGEMENT SYSTEM


The One-Stop Solution
For Service Station



COMPANY
INTRODUCTION

Hongyang Group is specializing in research, design and production of fuel dispenser, LPG,CNG,LNG and fuel-related equipment. It has more than 500 working staff and an area of 26000 m². Since its founding in 1992, it has gained dozens of certificates, either domestically or internationally. The products have well accepted in more than 60 countries and area, such as South-east Asia, Africa, Middle East and South America.

COMPANY STRUCTURE

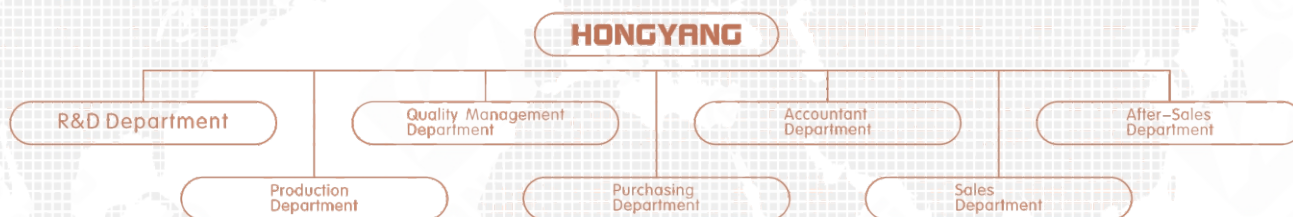

Hongyang Group is the one and only fuel dispenser and fuel-related equipment maker in China, which has been designing its own electronic, mechanical, and forecourt management system. The R&D and production of the whole electronic, mechanical and software are in the same factory, so it is easy and effective for quality control and management.

R&D

department | Complete R&D department with electronic, software, mechanical, sheet metal CAD



MCU development



Software design



Mechanical parts development



Sheet metal CAD

Production Department

Modern workshop, comprehensive equipment, integrated production, it's a sole manufacturer of mechanical parts and electronic components together in China.



Electronic workshop



Metal-working workshop



Assembly workshop



Warehouse

Quality management Department

Strict quality inspection and management



Raw material inspection



Electronic Components inspection




Mechanical Components inspection



Ex-factory inspection

Purchasing Department



Accountant Department



Sales Department



After-Sales Department



FUELING STATION SHOW




D series FUEL DISPENSER



TECHNICAL PERFORMANCE

Flow rate	55±5 (L/min), or 85±5 (L/min)
Meter Accuracy	±0.3 %
Noise	≤72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz,0.75kw or AC380V/50Hz,0.75kw
Input Voltage	AC 220V/50 Hz or AC 380V/50 Hz
Electronic Counter	Liter range: 0.01~999999.99
	Sale Range: 0.01~999999.99
	Unit Price range: 0.01~9999.99
	Totalizer range: 0~999999999
Environmental Condition	Temperature: -40℃ ~ +50℃
	Humidity: 5% ~95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant



Model

★D series CMD I 6875K-G
(Suction type, 1 Product, 1 Nozzle, 1 Flowmeter, 1 keypad, 2 displays)

Packing Size

★900*560*2180mm (Length*Thickness*Height)
★52 Sets in one 40 ft HQ container

Other Models with same size

★D series CMD I 6875K-G22
(Suction type, 1 Product, 1 Nozzle, 2 Flowmeters, 2 keypads, 2 displays)

Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)



Model

★D series CMD I 6875K-G22
(Suction type, 1 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 2 displays)

Packing Size

★900*560*2180mm (Length*Thickness*Height)
★52 Sets in one 40 ft HQ container

Models with same size

★D series CMD I 6875K-GA
(Suction type, 2 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 4 displays)

Submersible type fuel dispenser is available



Printer, LED Rolling display, Multimedia TV (Optional)

D series FUEL DISPENSER



TECHNICAL PERFORMANCE

Flow rate	55±5 (L/min), or 85±5 (L/min)
Meter Accuracy	±0.3 %
Noise	≤72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz,0.75kw or AC380V/50Hz,0.75kw
Input Voltage	AC 220V/50 Hz or AC 380V/50 Hz
Electronic Counter	Liter range: 0.01~999999.99 Sale Range: 0.01~999999.99 Unit Price range: 0.01~9999.99 Totalizer range: 0~999999999
Environmental Condition	Temperature: -40℃ ~+50℃ Humidity: 5% ~95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

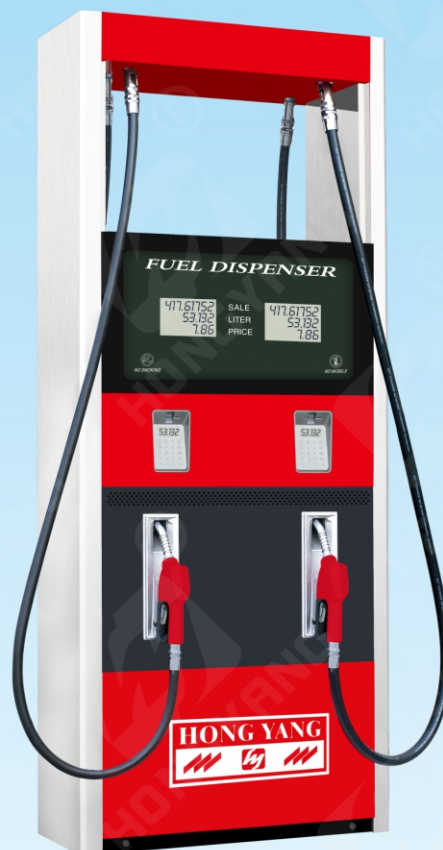

N=Nozzle
M=Meter
P=Pump



N=Nozzle
M=Meter
P=Pump

Model

★D series CMD I 6875K-GA

(Suction type, 2 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 4 displays)

Packing Size

★900*560*2180mm (Length*Thickness*Height)

★52 Sets in one 40 ft HQ container

Models with same size

★D series CMD I 6875K-G

(Suction type, 1 Product, 1 Nozzle, 1 Flowmeter, 1 keypad, 2 displays)

★D series CMD I 6875K-G22

(Suction type, 1 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 2 displays)

Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)

Model

★D series CMD I 6875K-GA44

(Suction type, 2 Products, 4 Nozzles, 4 Flowmeters, 4 keypads, 4 displays)

Packing Size

★1270*560*2420mm (Length*Thickness*Height)

★36 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available




Printer, LED Rolling display, Multimedia TV (Optional)

D series
FUEL DISPENSER



TECHNICAL PERFORMANCE

Flow rate	55±5 (L/min), or 85±5 (L/min)
Meter Accuracy	±0.3 %
Noise	<72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz,0.75kw or AC380V/50Hz,0.75kw
Input Voltage	AC 220V/50 Hz or AC 380V/50 Hz
Electronic Counter	Liter range: 0.01~999999.99
	Sale Range: 0.01~999999.99
	Unit Price range: 0.01~9999.99
	Totalizer range: 0~999999999
Environmental Condition	Temperature: -40℃ ~+50℃
	Humidity: 5% ~95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

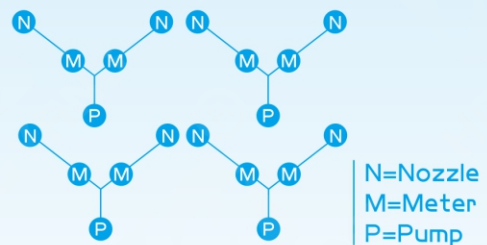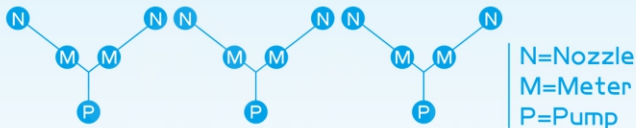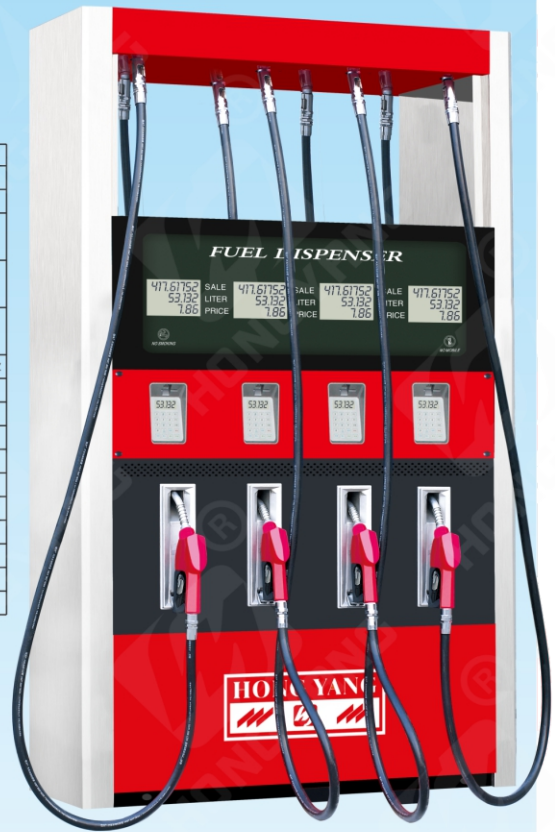

- **Model**
★D series CMD I 6875K-GB66
(Suction type, 3 Products, 6 Nozzles, 6 Flowmeters, 6 keypads, 6 displays)
- **Packing Size**
★ 1270*560*2420mm (Length*Thickness*Height)
★ 36 Sets in one 40 ft HQ container
- **Submersible type fuel dispenser is available**
- **Printer, LED Rolling display, Multimedia TV (Optional)**

- **Model**
★D series CMD I 6875K-GC88
(Suction type, 4 Products, 8 Nozzles, 8 Flowmeters, 8 keypads, 8 displays)
- **Packing Size**
★ 1615*560*2420mm (Length*Thickness*Height)
★ 29 Sets in one 40 ft HQ container
- **Submersible type fuel dispenser is available**
- **Printer, LED Rolling display, Multimedia TV (Optional)**



HONGYANG

TEL: 0086-577-88097339 / 88097298
FAX: 0086-577-88097280/P.C:325006
Add: NO.3,Gaoxiang Road, Gaoxiang Industrial Area,
Ouhai District,Wenzhou,Zhejiang,China
E-mail:wells@chinahongyang.com



鸿洋集团有限公司

HONGYANG GROUP CO.,LTD.
地址: 浙江省温州市瓯海区高翔工业区高翔路3号