

- ★ FUEL DISPENSERS
- ★ ADBLUE DISPENSERS
- ★ CHARGING PILE
- ★ INDUSTRIAL PUMP
- ★ MOBILE CONTAINER FUELING STATION
- ★ ELECTRONIC PARTS
- ★ MECHANICAL PARTS
- ★ TANK GAUGING SYSTEM
- ★ FUEL MANAGEMENT SYSTEM

The One-Stop Solution
For Service Station



COMPANY
INTRODUCTION

Hongyang Group is specializing in research, design and production of fuel dispenser, LPG,CNG,LNG and fuel-related equipment. It has more than 500 working staff and an area of 26000 m². Since its founding in 1992, it has gained dozens of certificates, either domestically or internationally. The products have well accepted in more than 60 countries and area, such as South-east Asia, Africa, Middle East and South America.

COMPANY STRUCTURE



Hongyang Group is the one and only fuel dispenser and fuel-related equipment maker in China, which has been designing its own electronic, mechanical, and forecourt management system. The R&D and production of the whole electronic, mechanical and software are in the same factory, so it is easy and effective for quality control and management.

R&D
department

Complete R&D department with electronic, software, mechanical, sheet metal CAD




MCU development



Software design



Mechanical parts development

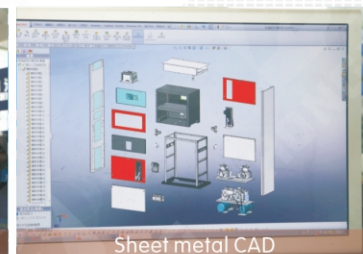

Sheet metal CAD

Production Department

Modern workshop, comprehensive equipment, integrated production, it's a sole manufacturer of mechanical parts and electronic components together in China.



Electronic workshop



Metal-working workshop



Assembly workshop



Warehouse

Quality management Department

Strict quality inspection and management



Raw material inspection



Electronic Components inspection



Mechanical Components inspection



Ex-factory inspection

Purchasing Department



Accountant Department



Sales Department



After-Sales Department



FUELING STATION SHOW



F2 series FUEL DISPENSER



TECHNICAL PERFORMANCE

Flow rate	55 ± 5 (L/min), or 65 ± 5 (L/min)
Meter Accuracy	± 0.3 %
Noise	≤ 72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz, 0.75kw or AC380V/50Hz, 0.75kw
Input Voltage	AC 220V / 50 Hz or AC 380V / 50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99 Sale Range: 0.01 ~ 999999.99 Unit Price range: 0.01 ~ 9999.99 Totalizer range: 0 ~ 99999999
Environmental Condition	Temperature: -40℃ ~ +50℃ Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant



N=Nozzle
M=Meter
P=Pump



N=Nozzle
M=Meter
P=Pump

Model

★ F2 series CMD 1687SK-GA44
(Suction type, 2 Products, 4 Nozzles, 4 Flowmeters, 4 keypads, 4 displays)

Packing Size

★ 1240*680*2380mm (Length*Thickness*Height)
★ 27 Sets in one 40 ft HQ container

Main features

★ Two e-counter for all hoses
Two big indicator for amount/liter and three indicators for price on each side

Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)

Model

★ F2 series CMD 1687SK-GB66
(Suction type, 3 Products, 6 Nozzles, 6 Flowmeters, 2 keypads, 2 displays)

Packing Size

★ 1520*700*2380mm (Length*Thickness*Height)
★ 25 Sets in one 40 ft HQ container

Main features

★ Two e-counter for all hoses
Two big indicator for amount/liter and three indicators for price on each side



Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)

F2 series FUEL DISPENSER

TECHNICAL PERFORMANCE

Flow rate	55 ± 5 (L/min), or 85 ± 5 (L/min)
Meter Accuracy	± 0.3 %
Noise	≤ 72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz, 0.75kw or AC380V/50Hz, 0.75kw
Input Voltage	AC 220V / 50 Hz or AC 380V / 50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99
	Sale Range: 0.01 ~ 999999.99
	Unit Price range: 0.01 ~ 9999.99
	Totalizer range: 0 ~ 999999999
Environmental Condition	Temperature: -40℃ ~ +50℃
	Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

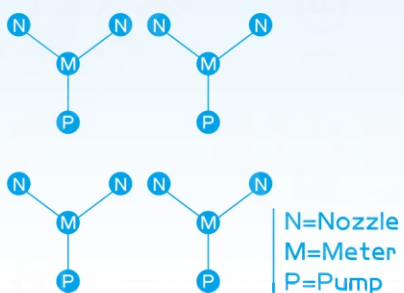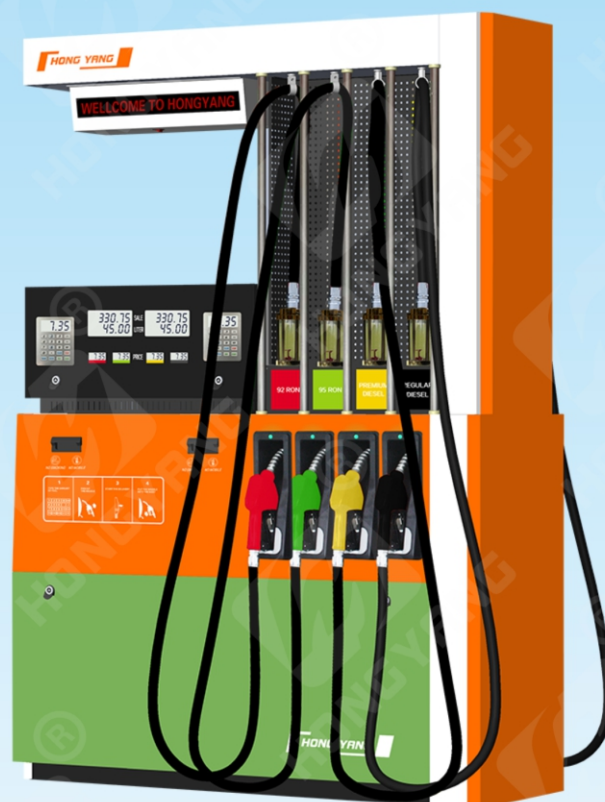

Model

- ★ F2 series CMD I 6875K-GC88
(Suction type, 4 Products, 8 Nozzles, 8 Flowmeters, 2 keypads, 2 displays)

Packing Size

- ★ 1 590*700*2380mm (Length*Thickness*Height)
- ★ 19 Sets in one 40 ft HQ container

Main features

- ★ Two e-counter for all hoses
- ★ Two big indicator for amount/liter and four indicators for price on each side
- ★ Submersible type fuel dispenser is available
- ★ Printer, LED Rolling display, Multimedia TV (Optional)



HONGYANG

TEL: 0086-577-88097339 / 88097298
FAX: 0086-577-88097280/P.C:325006
Add: NO.3,Gaoxiang Road, Gaoxiang Industrial Area,
Ouhai District,Wenzhou,Zhejiang,China
E-mail:wells@chinahongyang.com



鸿洋集团有限公司

HONGYANG GROUP CO.,LTD.
地址: 浙江省温州市瓯海区高翔工业区高翔路3号