

- ★ FUEL DISPENSERS
- ★ ADBLUE DISPENSERS
- ★ CHARGING PILE
- ★ INDUSTRIAL PUMP
- ★ MOBILE CONTAINER FUELING STATION
- ★ ELECTRONIC PARTS
- ★ MECHANICAL PARTS
- ★ TANK GAUGING SYSTEM
- ★ FUEL MANAGEMENT SYSTEM

The One-Stop Solution
For Service Station



COMPANY
INTRODUCTION

Hongyang Group is specializing in research, design and production of fuel dispenser, LPG,CNG,LNG and fuel-related equipment. It has more than 500 working staff and an area of 26000 m². Since its founding in 1992, it has gained dozens of certificates, either domestically or internationally. The products have well accepted in more than 60 countries and area, such as South-east Asia, Africa, Middle East and South America.

COMPANY STRUCTURE



Hongyang Group is the one and only fuel dispenser and fuel-related equipment maker in China, which has been designing its own electronic, mechanical, and forecourt management system. The R&D and production of the whole electronic, mechanical and software are in the same factory, so it is easy and effective for quality control and management.

R&D

department

Complete R&D department with electronic, software, mechanical, sheet metal CAD



MCU development



Software design




Mechanical parts development



Sheet metal CAD

Production Department

Modern workshop, comprehensive equipment, integrated production, it's a sole manufacturer of mechanical parts and electronic components together in China.



Electronic workshop



Metal-working workshop



Assembly workshop



Warehouse

Quality management Department

Strict quality inspection and management



Raw material inspection



Electronic Components inspection



Mechanical Components inspection



Ex-factory inspection

Purchasing Department



Accountant Department



Sales Department



After-Sales Department



FUELING STATION SHOW





L series FUEL DISPENSER



TECHNICAL PERFORMANCE

Flow rate	55 ± 5 (L/min), or 85 ± 5 (L/min)
Meter Accuracy	± 0.3 %
Noise	≤ 72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz, 0.75kw or AC380V/50Hz, 0.75kw
Input Voltage	AC 220V / 50 Hz or AC 380V / 50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99 Sale Range: 0.01 ~ 999999.99 Unit Price range: 0.01 ~ 9999.99 Totalizer range: 0 ~ 999999999
Environmental Condition	Temperature: -40℃ ~ +50℃ Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

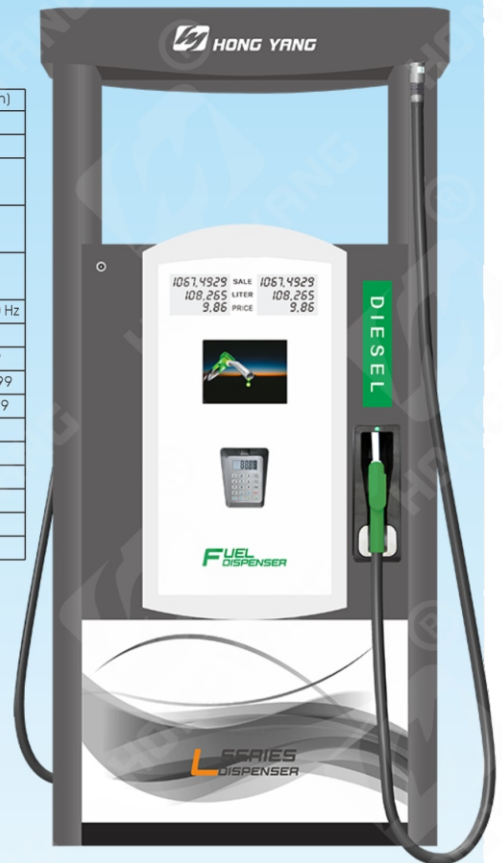

Model

★ L series CMD I 687SK-G22
(Suction type, 1 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 2 displays)

Packing Size

★ 1 | 25*600*2330mm (Length*Thickness*Height)
★ 36 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available

Printer, LED Rolling display, Multimedia TV (Optional)

Model

★ L series CMD I 687SK-GA
(Suction type, 2 Product, 2 Nozzles, 2 Flowmeters, 2 keypads, 4 displays)


Packing Size

★ 1 | 25*600*2330mm (Length*Thickness*Height)
★ 36 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available


Printer, LED Rolling display, Multimedia TV (Optional)

L series FUEL DISPENSER

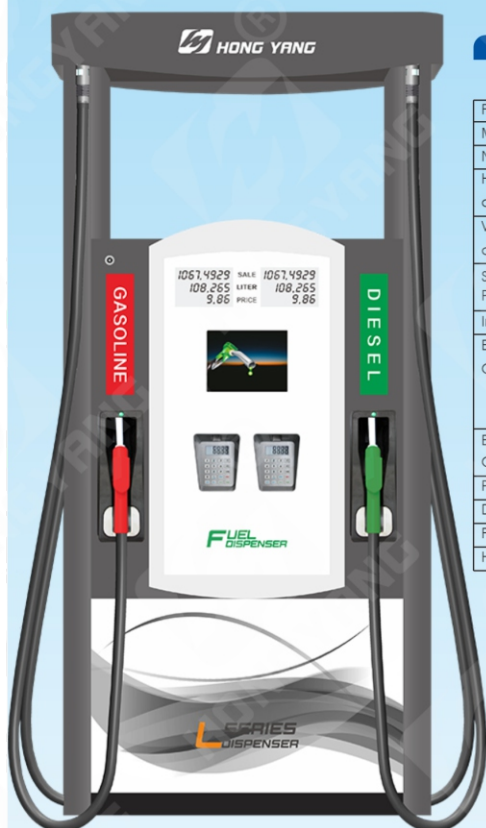

TECHNICAL PERFORMANCE

Flow rate	55 ± 5 (L/min), or 85 ± 5 (L/min)
Meter Accuracy	± 0.3 %
Noise	≤ 72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz, 0.75kw or AC380V/50Hz, 0.75kw
Input Voltage	AC 220V /50 Hz or AC 380V /50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99 Sale Range: 0.01 ~ 999999.99 Unit Price range: 0.01 ~ 9999.99 Totalizer range: 0 ~ 999999999
Environmental Condition	Temperature: -40℃ ~ +50℃ Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

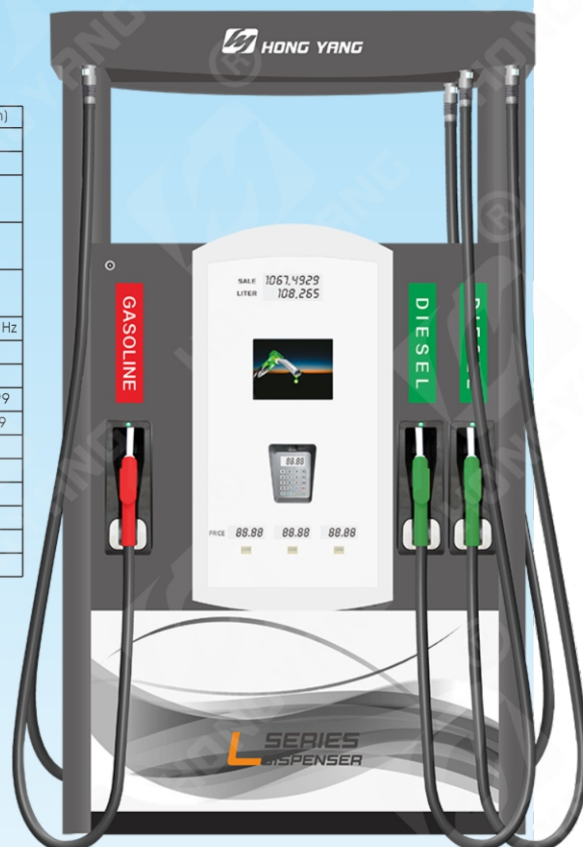

N=Nozzle
M=Meter
P=Pump



N=Nozzle
M=Meter
P=Pump

Model

★ L series CMD I 6875K-GA44
(Suction type, 2 Product, 4 Nozzles, 4 Flowmeters, 4 keypads, 4 displays)

Packing Size

★ 1125*600*2330mm (Length*Thickness*Height)
★ 36 Sets in one 40 ft HQ container

● Submersible type fuel dispenser is available

● Printer, LED Rolling display, Multimedia TV (Optional)

Model

★ L series CMD I 6875K-GB66
(Suction type, 3 Products, 6 Nozzles, 6 Flowmeters, 6 keypads, 6 displays)

Packing Size

★ 1430*650*2200mm (Length*Thickness*Height)
★ 25 Sets in one 40 ft HQ container



● Submersible type fuel dispenser is available

● Printer, LED Rolling display, Multimedia TV (Optional)

L series FUEL DISPENSER

TECHNICAL PERFORMANCE

Flow rate	55 ± 5 (L/min), or 85 ± 5 (L/min)
Meter Accuracy	± 0.3 %
Noise	≤ 72db
Horizontal suction distance	50m
Vertical suction distance	6m
Single or three Phase Motor	AC220V/50Hz, 0.75kw or AC380V/50Hz, 0.75kw
Input Voltage	AC 220V/50 Hz or AC 380V/50 Hz
Electronic Counter	Liter range: 0.01 ~ 999999.99
	Sale Range: 0.01 ~ 999999.99
	Unit Price range: 0.01 ~ 9999.99
	Totalizer range: 0 ~ 999999999
Environmental Condition	Temperature: -40°C ~ +50°C
	Humidity: 5% ~ 95%
Presetting function	Preset sale or volume
Data Storage	More than 10 years
Flexible Pipe	Included, 1.5" pipe
Hose	4.5m black, oil resistant

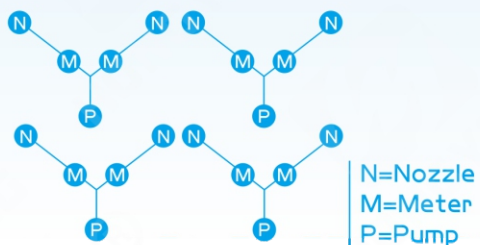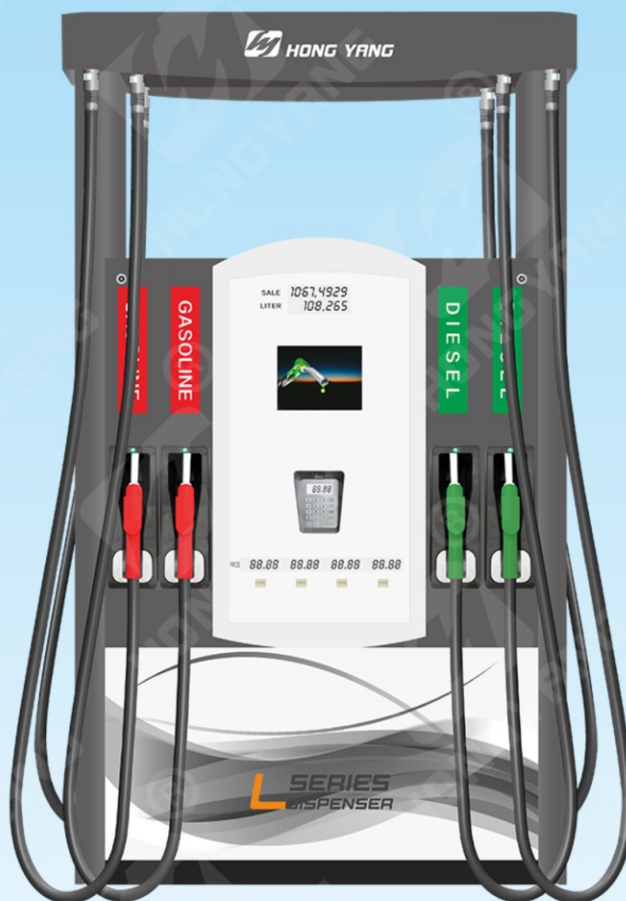

Model

★ L series CMD I 6875K-GC88
(Suction type, 4 Products, 8 Nozzles, 8 Flowmeters, 8 keypads, 8 displays)

Packing Size

★ 1430*650*2200mm (Length*Thickness*Height)
★ 25 Sets in one 40 ft HQ container

Submersible type fuel dispenser is available

● Printer, LED Rolling display, Multimedia TV (Optional)



HONGYANG

TEL: 0086-577-88097339 / 88097298

FAX: 0086-577-88097280/P.C:325006

Add: NO.3,Gaoxiang Road, Gaoxiang Industrial Area,
Ouhai District,Wenzhou,Zhejiang,China

E-mail:wells@chinahongyang.com



鸿洋集团有限公司

HONGYANG GROUP CO.,LTD.

地址: 浙江省温州市瓯海区高翔工业区高翔路3号